RICCAR.

ZZĄZZ

Owner's Manual



101010



IMPORTANT SAFETY INSTRUCTIONS

When using an electrical appliance, basic precautions should always be followed, including the following:

READ ALL INSTRUCTIONS BEFORE USING THIS APPLIANCE

WARNING: The manufacturer cannot accept responsibility for damage caused when the appliance is not used according to the instructions, or for uses other than those for which it was intended.

To reduce the risk of fire, electric shock or injury:

- Do not leave appliance when plugged in. Unplug from outlet when not in use and before servicing.
- WARNING: ELECTRIC SHOCK COULD OCCUR IF USED OUTDOORS OR ON WET SURFACES.
- Do not allow to be used as a toy. Close attention is necessary when used by or near children.
- Use only as described in this manual. Use only manufacturer's recommended attachments.
- Do not use with damaged cord or plug. If appliance is not working as it should, has been dropped, damaged, left outdoors, or dropped into water, return it to your Authorized Retailer for service.
- Do not pull or carry by cord, use cord as a handle, close a door on the cord, or pull cord around sharp edges or corners. Do not run appliance over cord. Keep cord away from heated surfaces.
- Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.
- Hold plug when rewinding the power cord to prevent the cord from whipping.

- Do not handle plug or appliance with wet hands.
- Do not put any object into openings. Do not use with any opening blocked; keep free of dust, lint, hair and anything that may reduce air flow.
- Keep hair, loose clothing, fingers and all parts of body away from openings and moving parts.
- Do not pick up anything that is burning or smoking, such as cigarettes, matches or hot ashes.
- Do not use without vacuum bag in place.
- Turn off all controls before unplugging.
- Use extra care when cleaning on stairs.
- Do not use to pick up flammable or combustible liquids such as gasoline or use in areas where they may be present.
- Do not attempt to service the unit while appliance is plugged in.
- Do not use vacuum to pick up water or any wet materials.

SAVE THESE INSTRUCTIONS.

Contents

Safety Precautions	
Replacing Vacuum Bag and Filters	
Description and Operation	
Using the Compact Nozzle	
Maintenance and Care	
Troubleshooting Guide	
Owner's Information	14
Warranty	

This vacuum cleaner should be used for normal, dry household dust and dirt. The manufacturer cannot be held responsible for any damage caused by use or operation of the vacuum contrary to these instructions. If the vacuum is wrongly operated for a purpose other than that for which it is intended, no liability can be accepted for any possible damage.

- Do not vacuum areas which contain moisture or water, flammable matter, needles, pins, razor blades, matches, cigarettes, etc., since they may damage the vacuum or vacuum bag.
- When rewinding the power cord, hold the plug before pressing the cord rewind button to prevent the cord from whipping.
- Make sure a vacuum bag and filters are always in place.
- This product is equipped with a polarized alternating current line plug (a plug having one blade wider than the other). This plug fits into the power outlet only one way. This is a safety feature. If you are unable to insert the plug fully into the outlet, try reversing the plug. If the plug should still fail to fit, contact an electrician to replace the obsolete outlet. Do not defeat the safety purpose of the polarized plug.

State of California Proposition 65 Warnings:

- WARNING: This product contains one or more chemicals known to the State of California to cause cancer.
- WARNING: This product contains one or more chemicals known to the State of California to cause birth defects or other reproductive harm.

See page 12 for maintenance recommendations.

Replacing the Vacuum Bag



Change the vacuum bag when the indicator is RED or suction power is weak. The dust cover will not close without a bag in the unit or if the bag is not properly installed.


- 1. Pull the bag holder straight out to access the bag.
- 2. Push the latch on the underside of the holder to release the bag collar.
- Remove and discard the used bag.
 NOTE: The Performance HEPA media bag cannot be reused.
- 4. Secure the new bag with the bag collar holder latch. Slide the tab on the bag holder into the slot on the front of the bag compartment.


Replacing the Secondary Filter


- 1. Open the bag compartment and locate the filter behind the vacuum bag. For better access to the secondary filter, remove the bag holder and bag.
- 2. Slide filter holder up and out.
- 3. Remove the used filter and replace it with a new filter.
- 4. Slide the filter holder back in place and replace the bag holder and bag.


Replacing the HEPA Media Filter

- 1. Locate the HEPA media filter inside the bag compartment near the door hinge.
- Press the black tab to remove the used filter and snap in a new filter.
 NOTE: The HEPA media filter cannot be washed and reused.

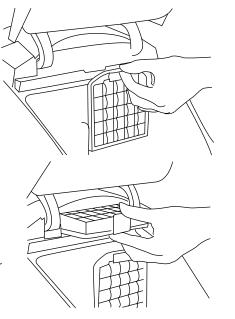

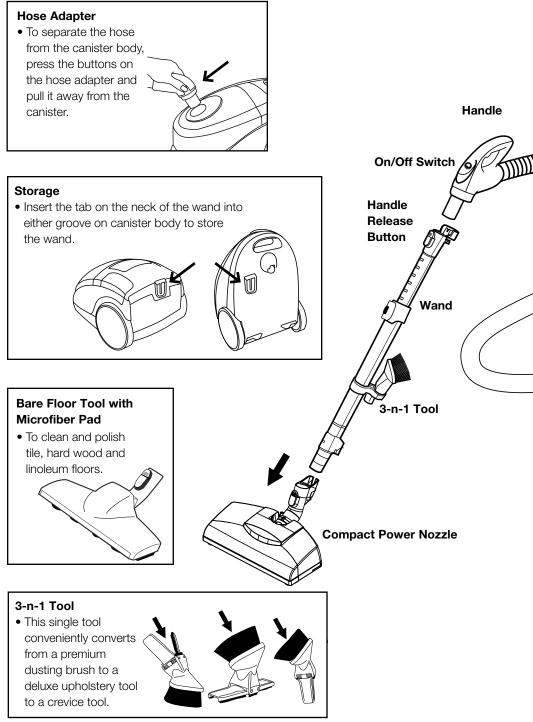

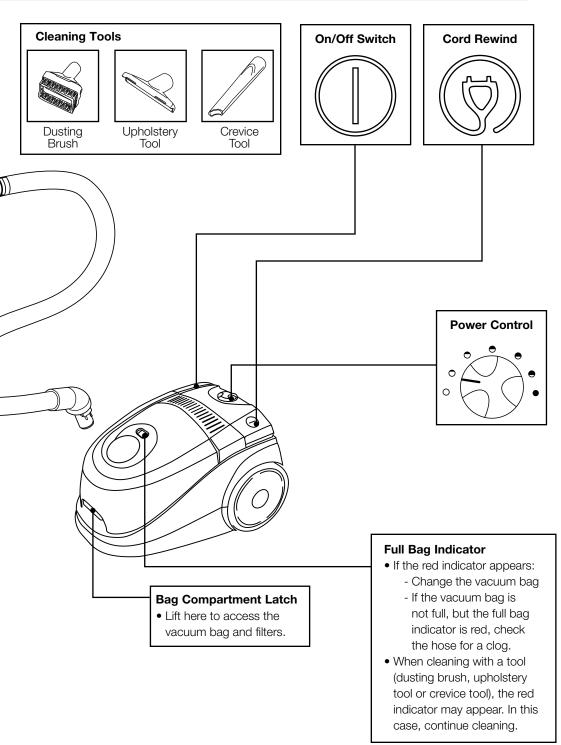

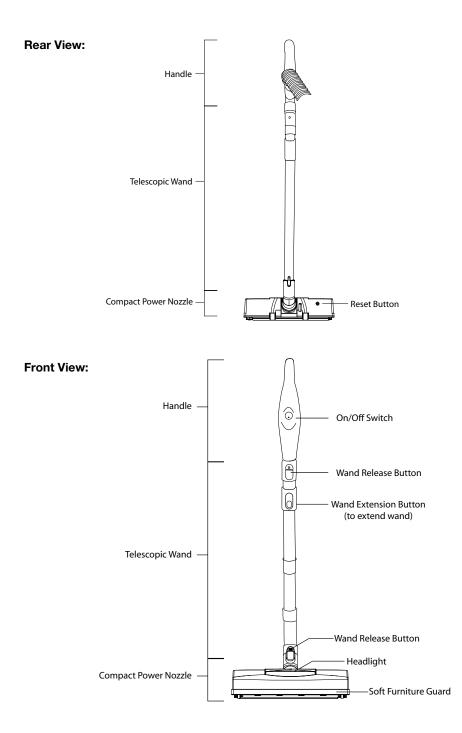


Turning On the Power Nozzle

The power nozzle can only be turned on if the canister is also turned on. The canister On/Off switch is located on the main body (see page 7). The power nozzle On/Off switch is located on the handle (see page 6). Simply press the switch forward to engage the power nozzle.

Using the Power Nozzle

After turning on the canister, lower the wand by stepping on the top of the power nozzle and pulling the wand toward you. Then turn on the power nozzle.



Removing and Inserting the Wand

Removing the wand from the power nozzle allows you to use cleaning tools for baseboard or ceiling cleaning. To do this, first turn the power nozzle and canister off. Then, press the wand release button and pull the wand out.

To reinsert the wand into the power nozzle, simply press the wand back into the neck of the power nozzle. The wand will then "click" into place.




Brushroll Jam Protection

Your power nozzle is equipped with a circuit breaker safety system that protects it from a jammed situation. Common items that cause jammed brushrolls include socks, excessive threads, corners of area rugs, etc.

If your power nozzle shuts off:

- Turn off the vacuum cleaner and power nozzle then unplug the power cord.
- Remove the object preventing the brushroll from turning.
- Locate the circuit breaker button on the back of the power nozzle and press it to reset the breaker.

If the nozzle shuts off again, repeat these steps to correct the problem. If this does not correct the problem, contact your authorized Riccar retailer for further assistance.

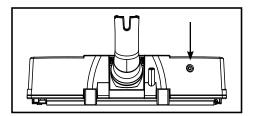

Removing the Brushroll

IMPORTANT: Before performing any maintenance on the power nozzle, always unplug the vacuum cleaner and disconnect the wand.

The brushroll may need to be removed at times, to cut threads that have become tangled around it or to replace the belt (see "Replacing the Belt" on page 12).


To remove the brushroll, turn the nozzle over and loosen the two large screws. Lift off the baseplate.


Pull the brushroll out and remove the endcap.


To reinstall the brushroll, replace the endcap and loop the belt over the end of the brushroll. Reinsert the brushroll into the nozzle making sure the long sides of the endcaps slide into the bottom housing.


To replace the baseplate, insert the tabs on each end of the baseplate into the grooves of the bottom housing.

Tighten the two large screws. Make sure the tabs on the front of the base plate are snapped securely in place in the bottom housing.









Replacing the Belt

IMPORTANT: Before performing any maintenance on the power nozzle, always unplug the vacuum cleaner and disconnect the wand.

To replace the belt, you must first remove the brushroll (See "Removing the Brushroll" see page 11). Then remove the 3 screws on each side of the bottom of the nozzle. Lift off the top cover and remove the belt.

To install a new belt, loop one end of the belt around the motor pulley then loop the other end of the belt around the brushroll.


Replace the top cover, making sure the reset button lines up through the cover and the front tabs snap securely in place.


Replace the three screws on each side of the bottom of the nozzle. Then replace the brushroll and base plate (see "Removing the Brushroll" see page 11).

When to Change Filters

At minimum, it's recommended to replace the HEPA media and charcoal filter after using twelve vacuum bags.

If someone in your household is sensitive to airborne allergens, it is recommended to change the filter set after every six vacuum bags.





Please check each item below if you have trouble with your vacuum. Unplug the vacuum from the power supply before servicing.

Problem	Check Point	Possible Solution
Suction power is weak.	Vacuum bag Wand or hose	If vacuum bag is full, replace it. If clogged or blocked,
		remove the object.
into vac Wh or a bloo pro	Is the hose adapter inserted into the suction opening of the vacuum completely?	Insert it completely.
	When the vacuum bag is full or any of the accessories are	Turn the vacuum off and unplug the vacuum.
	blocked, the over-heating protection for the motor is activated.	Check the vacuum
		bag and accessories
		and remove any
		blockages. The vacuum can be turned on again after approximately 20 minutes.
Power cord does not rewind.	Power cord	Pull the power cord out a little and press the cord rewind button again.
Power cord won't pull out of the vacuum.	Power cord	Do not pull it out by force. Rewind it a little by pressing the cord rewind button and try pulling it out again.

Specifications

Model: ZAZZ Rating: 120V/60Hz Amps: 11 The model and serial number of this product may be found on the bottom of the unit. You should note the model and serial number of your vacuum in the spaces provided below, and retain this book as a permanent record of your purchase.

Date of purchase	
Serial number	
Model number	
Purchased from:	
Store name	
Address	
City, State, Zip	
Telephone	

For Best Performance:

- Keep your canister clean and in good operating condition.
- Change vacuum bags once a month or when the bag is 2/3 full to maximize cleaning performance.
- Always use genuine vacuum bags and replacement parts. Use of other products may result in poor cleaning performance, potential vacuum cleaner damage and may void vacuum warranty. Genuine products are designed for maximum cleaning performance.
- Have your canister checked periodically by your Authorized Riccar Retailer.
- Use only Authorized Riccar Retailers for parts or service.
- Store your canister carefully in a dry area.
- For optimum cleaning performance and safety, follow your owner's manual instructions.

What is Covered:

This warranty covers any defects in material and workmanship in your new Riccar vacuum and applies exclusively to the original purchaser.

How Long Coverage Lasts:

Warranty coverage for the Riccar Pizzazz canister lasts two years. Household models used commercially are only warranted for 90 days.

What is Not Covered:

- Damage to the vacuum which occurs from neglect, abuse, alterations, accident, misuse or improper maintenance.
- Normal replacement items: filters, belts and disposable bags.

What Riccar Will Do:

This warranty provides, at no cost to you, all labor and parts to place this vacuum in correct operating condition during the warranted period.

How to Get Service:

Warranty service can only be obtained by presenting the vacuum to an Authorized Riccar Retailer. A proof-of-purchase and product serial number will be required before service is rendered. **To locate your nearest Riccar Retailer, please call 1-888-6-RICCAR or visit the Riccar website at www.riccar.com.**

THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ANY AND ALL OTHER WARRANTIES WHETHER WRITTEN, ORAL, EXPRESSED OR IMPLIED, (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE). THIS WARRANTY DISCLAIMS LIABILITY FOR INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

How State Law Applies:

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

