Owner's Manual
Manual Del Propietario

Kenmore®

Vacuum Cleaner
Aspiradora

Model , Modelo **116.34728**
116.34729

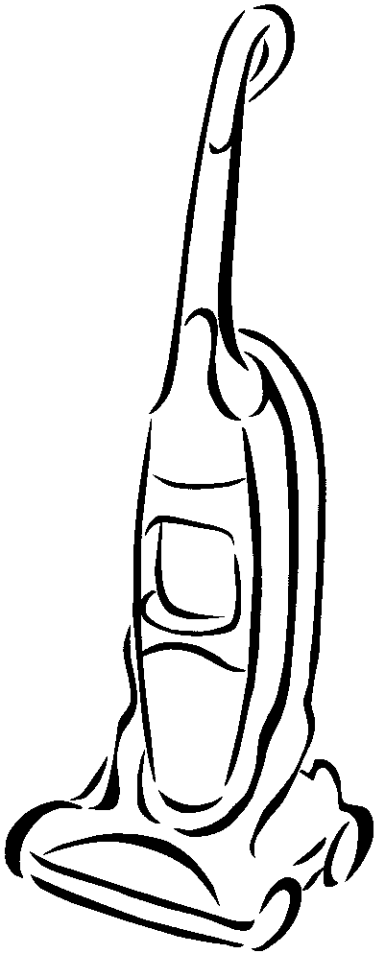

ENGLISH

ESPAÑOL

CAUTION:
Read and follow all safety and operating instructions before first use of this product.

CUIDADO:
Lea y sigua todas las instrucciones de operación y seguridad antes del uso de este producto.

Sears, Roebuck and Co., Hoffman Estates, IL 60179 U.S.A.
www.sears.com

Impreso en Mexico
Part No. CØ1ZCKPØØUØØ-KCØ1ZCKPZØUØ Printed in Mexico

TABLE OF CONTENTS

Before Using Your New Vacuum Cleaner 2
Kenmore Vacuum Cleaner Warranty . 2
Important Safety Instructions 3
Parts and Features 4
Assembly Instructions 5-6

Operating Instructions 6
Getting Started 6
Pile Height Selection and Setting 7
On/Off Switch 7
Variable Power Control 8
Releasing the Handle 8
Carpet/Bare Floor Selector 8
Attachments 9
Attachment Use Chart 10
Vacuuming Tips 10
Performance Features 11

Vacuum Cleaner Care 13
Vacuum Cleaner Storage 13
Cleaning Exterior and Attachments 13
Dust Bin Cleaning 14-15
Filter Screen Cleaning 15
Filter Changing/Cleaning 16
Belt Changing and Agitator Cleaning .17-19
Clog Removal 20
Light Bulb Changing 21

Troubleshooting 22
Requesting service . . . . . .(back page)

BEFORE USING YOUR NEW VACUUM CLEANER

Please read this guide. It will help you assemble and operate your new Kenmore vacuum cleaner in the safest and most effective way.

For more information about vacuum cleaner care and operation, call your nearest Sears store. You will need the complete model and serial numbers when requesting information. Your vacuum cleaner's model and serial numbers are located on the Model and Serial Number Plate.

Use the space below to record the model number and serial number of your new Kenmore vacuum cleaner.

Model No._____

Serial No. _____

Date of Purchase _____

Keep this book and your sales check (receipt) in a safe place for future reference.

KENMORE VACUUM CLEANER WARRANTY

LIMITED ONE YEAR WARRANTY ON KENMORE VACUUM CLEANER

This warranty is for one year from the date of purchase, and includes only private household vacuum cleaner use. During the warranty year, when this vacuum cleaner is operated and maintained according to the owner's manual instructions, Sears will repair any defects in material or workmanship free of charge.

This warranty excludes vacuum bags, belts, light bulbs, and filters, which are expendable parts and become worn during normal use.

For warranty service, return this vacuum cleaner to the nearest Sears Service Center in the United States.

This warranty applies only while this product is in use in the United States. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Sears, Roebuck and Co., D/817 WA, Hoffman Estates, IL 60179

IMPORTANT SAFETY INSTRUCTIONS

WARNING

Your safety is important to us. To reduce the risk of fire, electrical shock, injury to persons or damage when using your vacuum cleaner, follow basic safety precautions including the following:

Read all instructions in this manual before assembling or using your vacuum cleaner.

Use your vacuum cleaner only as described in this manual. Use only with Sears recommended attachments.

Disconnect electrical supply before servicing or cleaning out the brush area. Failure to do so could result in electrical shock or injury from moving parts.

Do not leave the vacuum cleaner when plugged in. Unplug from outlet when not in use and before servicing.

To reduce the risk of electrical shock - Do not use outdoors or on wet surfaces.

Do not allow to be used as a toy. Close attention is necessary when used by or near children.

Do not use with a damaged cord or plug. If vacuum cleaner is not working as it should, has been dropped, damaged, left outdoors, or dropped in water, return it to a Sears Service Center.

Do not pull or carry by cord, use cord as a handle, close a door on cord, or pull cord around sharp edges or corners. Do not run vacuum cleaner over cord. Keep cord away from heated surfaces.

Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.

Do not handle plug or vacuum cleaner with wet hands.

Do not put any objects into openings.

Do not use with any opening blocked; keep free of dust, lint, hair, and anything that may reduce air flow.

Keep hair, loose clothing, fingers, and all parts of body away from openings and moving parts.

Turn off all controls before unplugging.

Use extra care when cleaning on stairs. Do not rest vacuum cleaner on steps. Do not put on chairs, tables, etc. Keep on floor.

Do not use vacuum cleaner to pick up flammable or combustible liquids (gasoline, cleaning fluid, perfumes, etc.), or use in areas where they may be present. The fumes from these substances can create a fire hazard or explosion.

Do not pick up anything that is burning or smoking, such as cigarettes, matches, or hot ashes.

Do not use vacuum cleaner without dust bag and/or filters in place.

Always change the dust bag after vacuuming carpet cleaners or freshener, powders, and fine dust. These products clog the bag, reduce airflow and can cause the bag to burst. Failure to change the bag promptly could cause permanent damage to the vacuum cleaner.

Do not use the vacuum cleaner to pick up sharp hard objects, small toys, pins, paper clips, etc. They may damage the vacuum cleaner or dust bag.

Unplug before connecting Handi-mate Jr. (if applicable). Keep hands away from bristles when unit is on.

You are responsible for making sure that your vacuum cleaner is not used by anyone unable to operate it properly.

Do not extend the stretch hose, extension hose or hose combination beyond its reach. Doing so can cause the vacuum cleaner to tip and may cause personal injury or property damage.

ENGLISH

SAVE THESE INSTRUCTIONS

Proper assembly and safe use of your vacuum cleaner are your responsibilities. Your vacuum cleaner is intended for **Household use**. Read this Owner's Manual carefully for important use and safety information. This guide contains safety statements under warning and caution symbols.

PARTS AND FEATURES

Item	Part No. In U.S.	Part No. In Canada
Exhaust Filter	20-86889	20-86889C
Primary Filter	20-82720	20-82720
Headlight Bulb	20-5248	20-40300
Belt	20-5275	20-40096

It is important to know your vacuum cleaner's parts and features to assure its proper and safe use. Review these before using your vacuum cleaner.

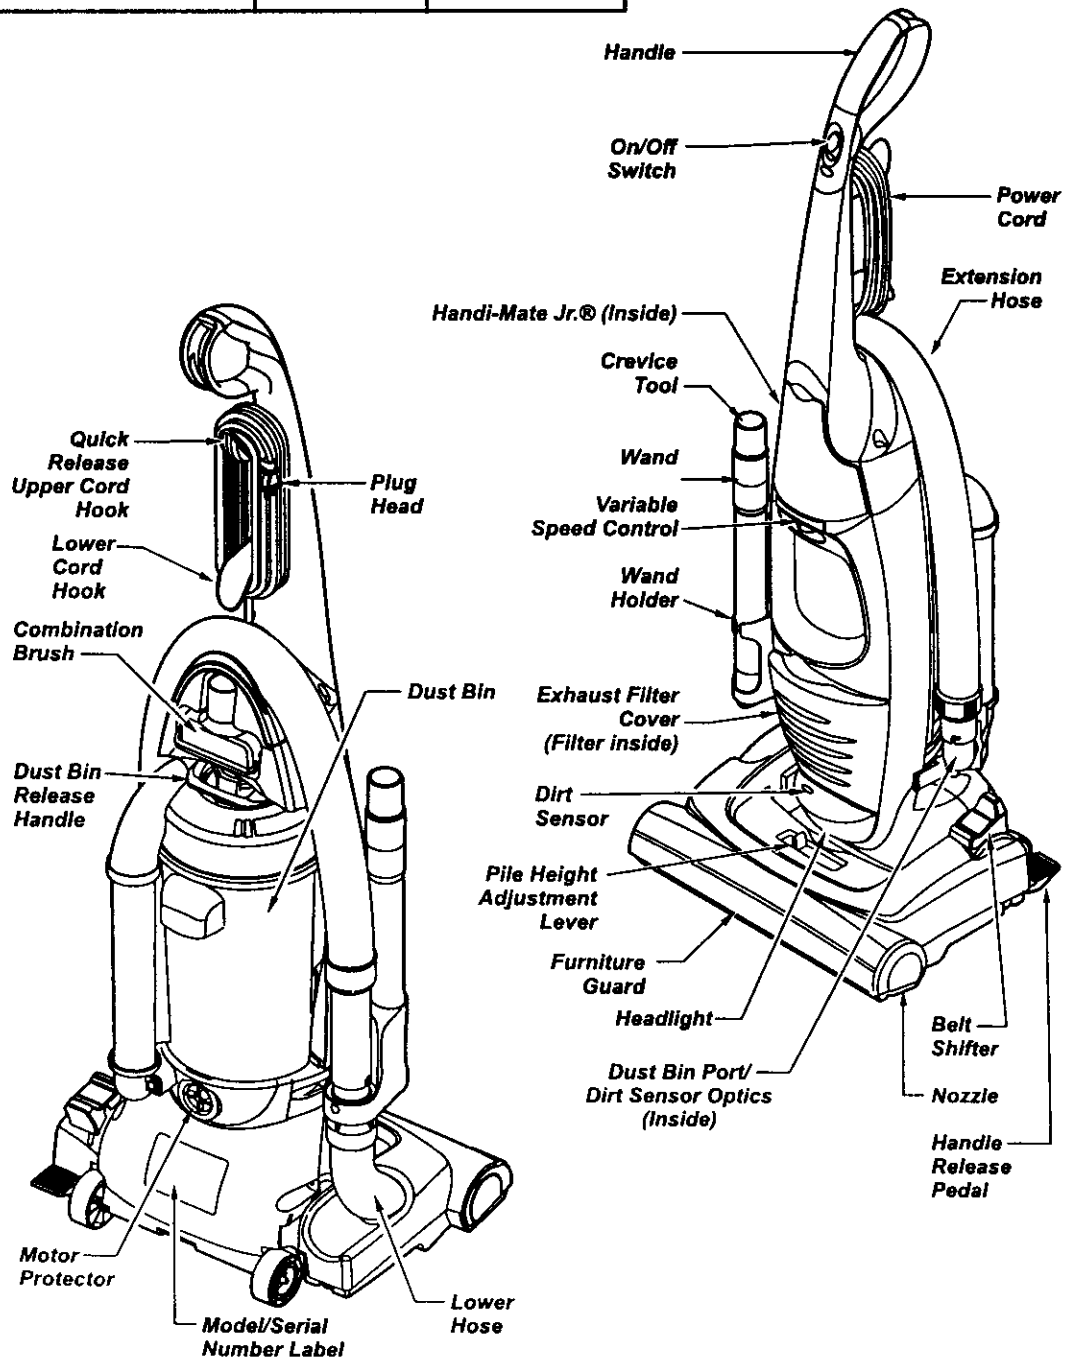

Please pay special attention to these hazard alert boxes, and follow any instructions given. **WARNING** statements alert you to such dangers as fire, electric shock, burns and personal injury. **CAUTION** statements alert you to such dangers as personal injury and/or property damage.

ASSEMBLY INSTRUCTIONS

WARNING

Electrical Shock Hazard

Do not plug into the electrical supply until the assembly is complete. Failure to do so could result in electrical shock or injury.

Before assembling the vacuum cleaner, check the **PACKING LIST** on the cover of the separate Repair Parts List. Use this list to verify that you have received all the components of your new Kenmore vacuum cleaner.

Remove tape from dust bin release handle.

HANDLE ASSEMBLY

Remove the two (2) handle screws located in the body.

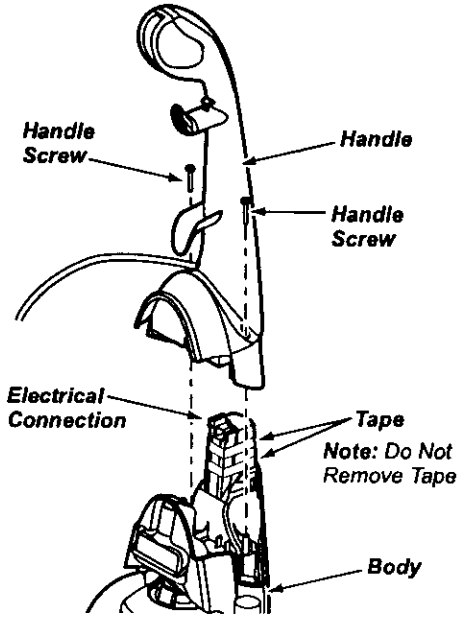

Position the handle as shown in the illustration below.

When installing the handle, firmly press the handle onto the body. Secure with handle screws provided.

CAUTION

Do not overtighten.

Overtightening could strip the screw holes.

Do not operate the vacuum cleaner without the screws in place.

ENGLISH

CORD ASSEMBLY

Make sure the quick release upper cord hook is in the upright position. Remove the wire tie from the power cord.

Lock the power cord into the locking notch base by pressing it into the quick release upper cord hook as shown. This helps keep the power cord out from under the vacuum cleaner agitator.



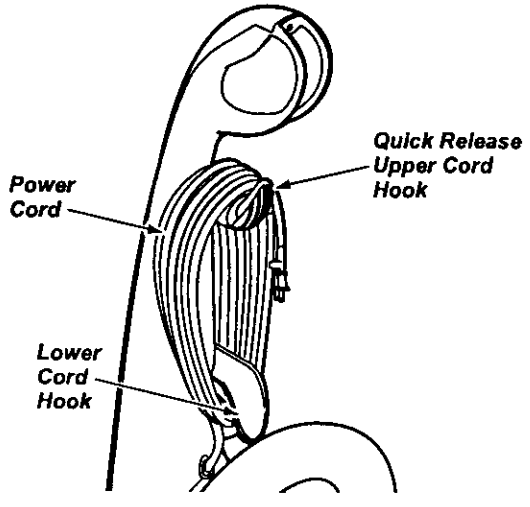

Wrap the power cord around the upper and lower cord hooks and lock the power cord plug onto the power cord.

EXTENSION HOSE ASSEMBLY

1. Connect extension hose to the wand holder by twisting and pushing down over the wand holder to assure a good connection.

2. Connect the extension hose by aligning the "J" slot with raised tabs. Push downward and rotate clockwise to lock in place.

For use of extension wand and hose see **ATTACHMENTS** section.

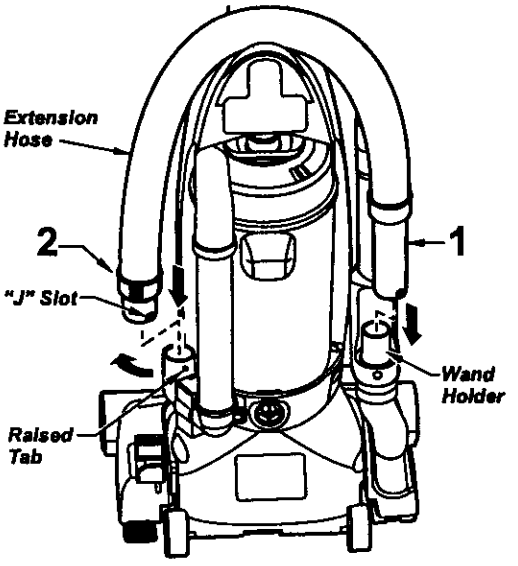

Remove the Handi-Mate Jr. ® from the plastic bag and insert Handi-Mate Jr. ® into the vacuum cleaner as shown, then close the Handi-Mate Jr. ® storage cover.



OPERATING INSTRUCTIONS

CORD RELEASE



1. Turn the quick release upper cord hook to either side and down to release the power cord.

2. Release the power cord plug from the power cord and pull the cord off the quick release upper cord hook. Be sure the power cord is still locked into the locking notch on the upper cord hook.

3. Plug the polarized power cord into a 120 Volt outlet located near the floor.

4. To replace cord, turn upper hook counter-clockwise pointing up, then wrap cord.

WARNING

To reduce the risk of electric shock, this vacuum cleaner has a polarized plug, (one blade is wider than the other.)

WARNING

This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified technician to install the proper outlet. Do not change the plug in any way.

WARNING

Personal Injury and Product Damage Hazard

- **DO NOT plug in if switch is in the ON position. Personal injury or damage could result.**
- **DO NOT use outlets above counters. Damage from cord to items in surrounding area could occur.**

PILE HEIGHT SELECTION AND SETTING

To select a pile height setting:

Turn off vacuum cleaner. Select a pile height setting by tilting the vacuum cleaner back until front wheels are lifted slightly off the floor.

Slide the adjustment lever to the correct setting.

SUGGESTED PILE HEIGHT SETTINGS

You may need to raise the height to make some jobs easier, such as scatter rugs and longer pile carpets. Suggested settings are:

HIGH: shag carpet, long pile, plush, scatter rugs.

MED: medium to long pile.

LOW: short to medium pile.

EX LOW: very low pile and bare floors.

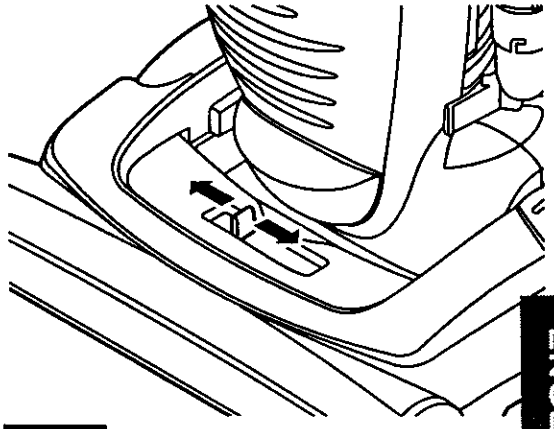

ENGLISH

WARNING

Personal Injury Hazard

To avoid personal injury, DO NOT place hands or feet underneath the unit when changing height setting.

ON/OFF SWITCH

To start the vacuum cleaner, slide the **ON/OFF** switch from the **OFF** position to the **ON** position. To stop the vacuum cleaner, slide the **ON/OFF** switch to the **OFF** position.

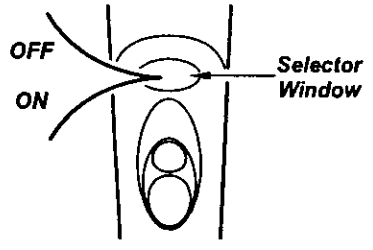

VARIABLE POWER CONTROL

This vacuum cleaner is equipped with a variable power control which will allow you to select any cleaning power from low to high.

Set to **LOW** suction power for delicate fabrics such as draperies. Set to **MAX** or full power for more conventional carpet or bare floor cleaning.

To set to **MAX** suction power, move the control knob fully to the right.

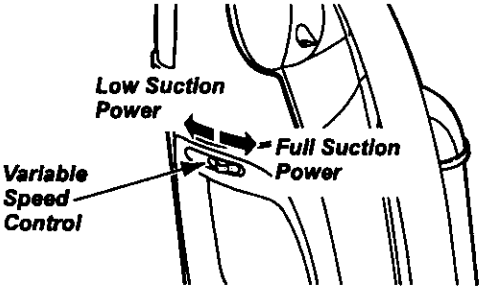

For deep cleaning set the power control to **MAX.**

RELEASING THE HANDLE

Release the handle by pressing down on the handle release pedal with your foot and pulling back and down on the handle with your hand.

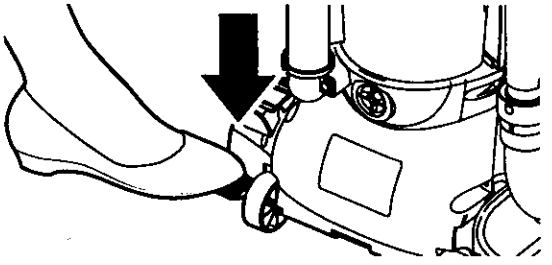

CARPET/BARE FLOOR SELECTOR

Bare floor setting: Slide the carpet/bare floor selector all the way back and down toward the bottom of the nozzle until it locks into place.

In this position the brush assembly does not revolve. This setting should be used for cleaning hardwood and tile floors and **when any attachments (tools) are used.**

Carpet setting: Slide the selector **all the way forward** and up to the carpet position.

In this position the brush assembly will turn. When carpets are being cleaned the selector should be in this position.

Attention: Refer to your carpet manufacturers cleaning recommendations. Some more delicate carpets may require that they be vacuumed with the agitator turned off, to prevent carpet damage.

CAUTION

Do not allow vacuum cleaner to remain in one spot for any length of time when the agitator is turning. Damage to carpet may occur.

NOTE: For longer belt life, turn vacuum off before moving selector. Failure to do so can cause the belt to rub on the selector shaft and may result in the belt becoming hot and creating a burning rubber smell.

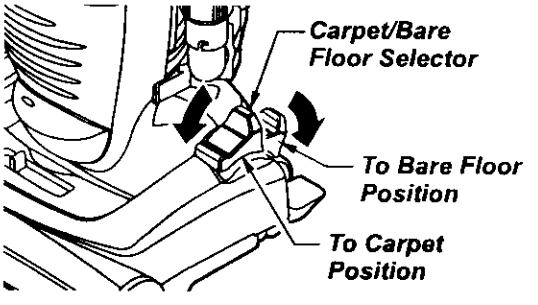

ATTACHMENTS

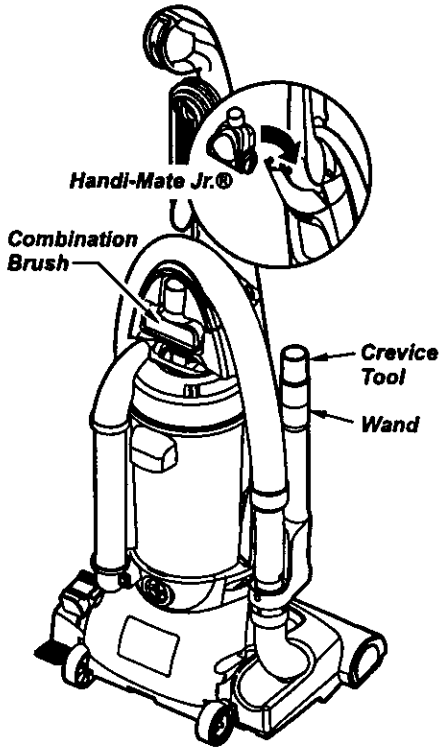

Identify each of the attachments shown above.

Remove the upper end of the hose that is attached to the wand holder by grasping the hose collar, twisting and pulling straight out. The attachments can now be added to the hose.

Note: The motor protector may open when using attachments or when cleaning new carpet, due to reduced airflow by the attachments themselves or by new carpet lint filling the dust bin quickly. See the **TROUBLESHOOTING** table.

Note: When using attachments make sure the vacuum cleaner is in the upright position and the Carpet/ Bare Floor selector is in the **BARE FLOOR** position.

WARNING

Electrical Shock And Personal Injury Hazard

Disconnect electrical supply before servicing or cleaning the unit. Failure to do so could result in electrical shock or personal injury from vacuum cleaner suddenly starting.

To achieve maximum reach with the attachments, add the crevice tool to the end of the wand by inserting and twisting slightly.

CAUTION

When using attachments, be careful not to overextend the stretch hose when reaching. Trying to reach beyond the hose stretch capability could cause the vacuum cleaner to tip over.

ENGLISH

Handi-Mate Jr.®

For operation of Handi-Mate Jr.® see separate owners manual



TO STORE ATTACHMENTS

Remove combination brush from wand or hose. Snap into appropriate storage location.

Remove crevice tool from the wand by twisting. Place in end of wand.

Reattach the extension hose to the wand holder and place wand in slot on front of wand holder.

Reinsert Handi-Mate Jr.® into the vacuum cleaner as shown then close the Handi-Mate Jr.® storage cover.



CAUTION

Attachments used in dirty areas, such as under refrigerator, should not be used on other surfaces until they are washed. They could leave marks.

ATTACHMENT USE CHART

ATTACHMENTS	Furniture*	Between Cushions*	Drapes*	Stairs	Walls
CREVICE TOOL	✓	✓		✓	
COMBINATION BRUSH	✓		✓	✓	✓
Handi-Mate Jr. ®	✓			✓	

*Always clean attachments before using on fabrics. ✓ = Applicable

VACUUMING TIPS

Carpet edges
Guide either side or the front of the nozzle along a baseboard. The full width agitator brushes help remove dirt at carpet edges.

Stairs
Set handle in full upright position. Set the Carpet/ Bare Floor selector to **BARE FLOOR** when using attachments to prevent possible floor damage. Use the crevice tool or combo brush.

WARNING

Personal Injury Hazard

Do not place the vacuum cleaner on the stairs. If may fall causing, personal injury or property damage.

For best cleaning results, keep the airflow passage clear.

CAUTION

Unplug the vacuum cleaner from the outlet before checking.

MOTOR PROTECTION SYSTEM

Thermal Protector

This vacuum cleaner has a thermal protector which automatically trips to protect the vacuum from overheating. If a clog prevents the normal flow of air to the motor, the thermal protector turns the motor off automatically. This allows the motor to cool in order to prevent possible damage to the vacuum cleaner.

To correct problem: If this occurs, turn the vacuum cleaner off and unplug the power cord from the outlet to allow the vacuum cleaner to cool and the thermal protector to reset. **Check for and remove clogs, if necessary. Also check and clean/replace any clogged filters. Wait approximately thirty (30) minutes and plug the vacuum cleaner in and turn back on to see if the motor protector has reset. The motor protector will not reset if the vacuum cleaner is not turned off even if the vacuum cleaner has cooled down.**

MOTOR PROTECTOR

This vacuum cleaner is also equipped with a motor protector by-pass valve which automatically opens to provide cooling air to the motor when a clog prevents the normal flow of air to the motor. If the by-pass valve opens to prevent motor overheating and possible damage to the vacuum cleaner, you will notice a change of sound as air rushes through the valve opening.

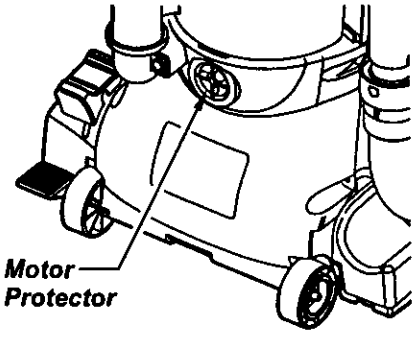

Note: Do not block motor protector.

To correct problem: See the **TROUBLE-SHOOTING** table.

Note: The motor protector may open when using attachments or when cleaning new carpet, due to reduced airflow caused by the attachments themselves or by new carpet lint filling the dust bin quickly. See the **TROUBLESHOOTING** table.

DIRT SENSOR

The electronic dirt sensor is a feature which will detect particles as they pass through the vacuum cleaner.

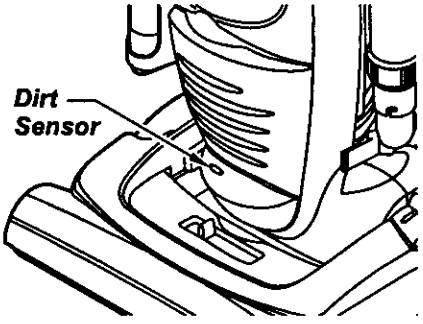

The dirt sensor indicator is located on the front of the vacuum cleaner as illustrated.

A red light indicates dirt is being picked up by the vacuum cleaner.

OPERATION

As you vacuum, the red indicator light will come on and stay on as long as the sensor detects a high concentration of particles passing through the vacuum cleaner.

WARNING

Electrical Shock And Personal Injury Hazard

Disconnect electrical supply before servicing or cleaning the unit. Failure to do so could result in electrical shock or personal injury from vacuum cleaner suddenly starting.

TO CLEAN DIRT SENSOR OPTICS

The dirt sensor optics consist of two optic cells located inside the dust bin port assembly. Occasionally, it may become necessary to clean the two optic cells to assure maximum performance.

Clean optic cells:

- When the red light stays on continuously.
- When dirt or dust adheres to the optic cells.
- Whenever the dust bin is cleaned.

To clean the dirt sensor optics, remove Dust Bin as outlined in the (Dust Bin Cleaning section).

With the dust bin removed you can insert a cloth into the dust bin port opening.

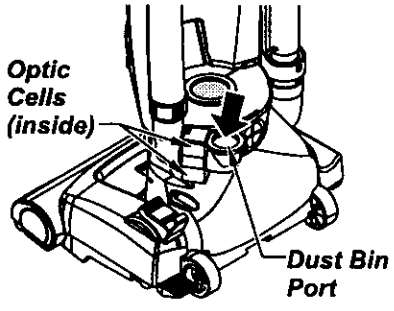

Wipe the optic cells with a soft, dry cloth.

Never use cleaners or liquids as they can help speed the recoating of the optic cells and make it necessary to clean them much sooner than normal.

VACUUM CLEANER CARE

Always follow all safety precautions when cleaning and servicing the vacuum cleaner.

WARNING

Electrical Shock And Personal Injury Hazard

Disconnect electrical supply before performing maintenance to the unit. Failure to do so could result in electrical shock or personal injury from vacuum cleaner suddenly starting.

ENGLISH

VACUUM CLEANER STORAGE

Gather the cord and wrap it loosely around the upper and lower cord hooks.



Store the vacuum cleaner in a dry, indoor area, on the floor with the handle locked in the upright position.

WARNING

Electrical Shock And Personal Injury Hazard

Wrapping the cord too tightly puts stress on the cord and can cause cord damage. A damaged cord is an electrical shock hazard and could cause personal injury or damage.

CLEANING EXTERIOR AND ATTACHMENTS

Unplug cord from wall outlet. **DO NOT** drip water on vacuum cleaner.

Clean exterior using a clean, soft cloth that has been dipped in a solution of mild liquid detergent and water, then wrung dry. Wipe dry after cleaning.

To reduce static electricity and dust build-up, wipe outer surface of vacuum cleaner and attachments.

Wash attachments in warm soapy water, rinse and air dry. **DO NOT clean in dishwasher.**

CAUTION

Do not use attachments if they are wet. Attachments used in dirty areas, such as under a refrigerator, should not be used on other surfaces until they are washed. They could leave marks.

DUST BIN CLEANING

Always empty the dust bin when dirt level reaches the "MAXIMUM FILL" line.

TO REMOVE DUST BIN

WARNING

Electrical Shock And Personal Injury Hazard

Always unplug power cord from electrical outlet before performing any maintenance on vacuum cleaner.

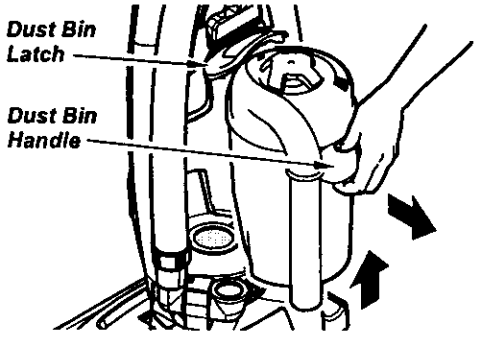

Raise the dust bin latch. Grasp the handle located at the side. Lift up and out to remove dust bin from vacuum cleaner.

Remove any clogs that might be located in the dust bin port or the filter screen.



CAUTION

Do not use dust bin handle to carry unit.

Do not carry dust bin by dust bin lid.

Every time dust bin is removed, rotate cleaning knob on top of dust bin until filter is clean to maintain cleaning performance.

TO EMPTY DUST BIN

Hold dust bin over a trash container. Lift dust bin lid directly off the dust bin.

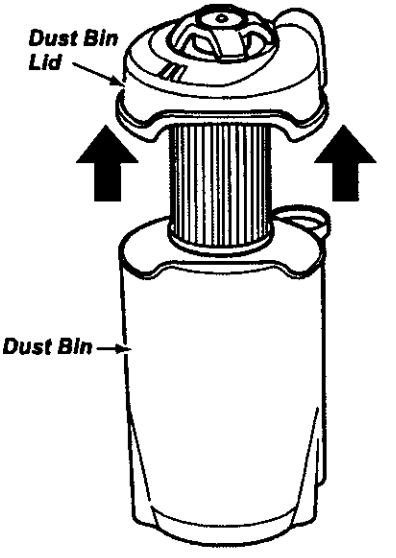



Pour dust bin contents into a trash container.

TO CLEAN FILTER

See Filter Changing/Cleaning section.

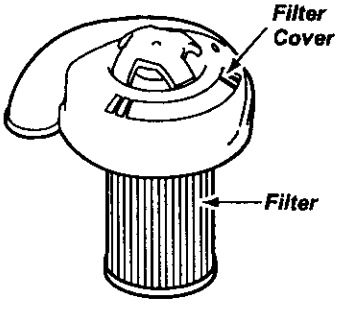

TO REPLACE DUST BIN

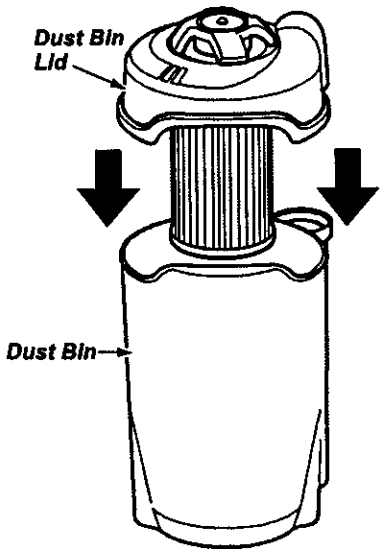

Replace dust bin lid assembly by placing back on dust bin as shown.

Place dust bin into vacuum cleaner

Secure dust bin into place by closing the dust bin latch.

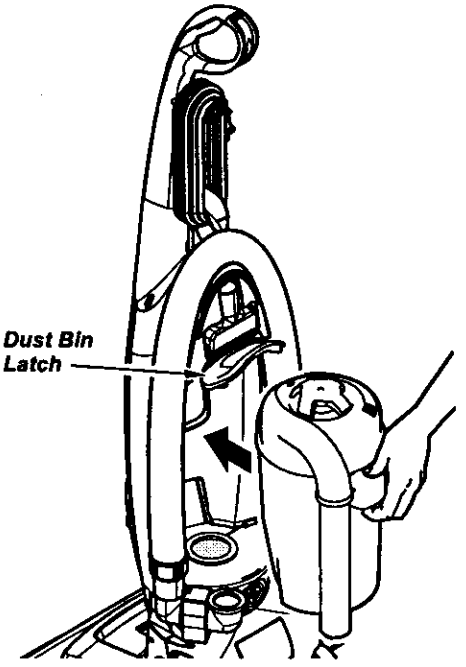

ENGLISH

FILTER SCREEN CLEANING

Remove the dust bin as outlined in the DUST BIN CLEANING section.

Check filter screen frequently and clean when dirty.

To clean filter screen, wipe screen with a dry cloth.

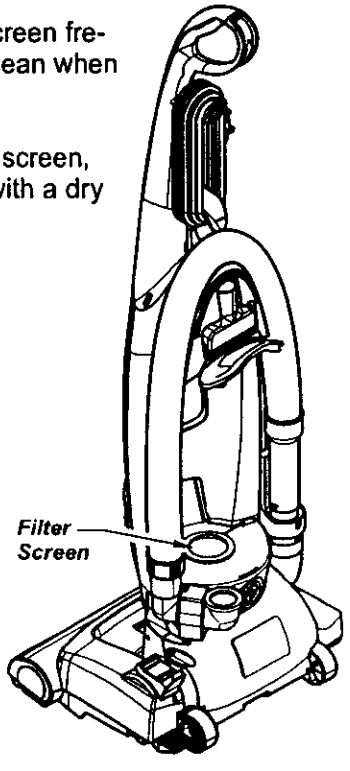

WARNING

Electrical Shock Hazard

Unplug power cord from electrical outlet. Do not operate the vacuum cleaner without the primary or exhaust filters. Be sure the filters are properly installed to prevent motor failure and/or electrical shock.

PRIMARY FILTER

Check primary filter frequently and clean when dirty.

TO REMOVE PRIMARY FILTER

Remove the dust bin and dust bin lid assembly as outlined in the **DUST BIN CLEANING** section.

While holding primary filter over a trash container grasp filter, rotate and lift off.



Clean primary filter by gently tapping over a trash container. Tap on several sides to ensure best cleaning. **Rinse with water only as needed,** do not use any detergent or soap. Allow the filter to dry for 24 hours before putting it back into the vacuum cleaner.

When cleaning the filter no longer restores vacuum suction to full power you need to replace the filter.

Note: See **PARTS AND FEATURES** for the filter number.

TO REPLACE PRIMARY FILTER

With slot side on filter towards the filter cover slide cleaning cam inside opening, rotate filter clockwise until slots lock onto tabs in cover.



Note: Under normal use and care, your filter can be expected to last up to 5 years.

Re-assemble dust bin lid to dust bin. Insert into vacuum cleaner and secure with dust bin latch.

EXHAUST FILTER

HEPA

The exhaust filter must be replaced when dirty. It should be replaced regularly depending on use conditions.

The filter CANNOT be washed as it will lose its dust trapping ability.

Note: See **PARTS AND FEATURES** for the filter number.

Remove filter cover by pulling out at the top of the exhaust filter cover.

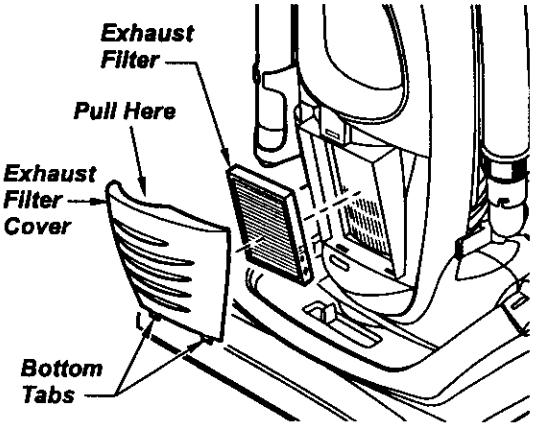

Remove the exhaust filter cartridge.

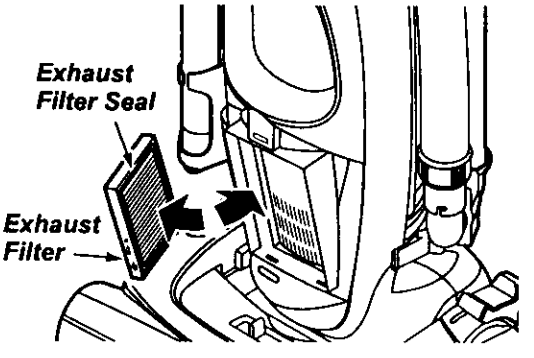

Push only on filter cartridge frame, not on filter material itself. **The foam seal of the filter should be placed against the vacuum cleaner body**

Replace the exhaust filter cover by placing bottom tabs in slots and pushing in until cover snaps into place.

BELT CHANGING AND AGITATOR CLEANING

WARNING

Electrical Shock Or Personal Injury Hazard

Disconnect electrical supply before servicing or cleaning the unit. Failure to do so could result in electrical shock or personal injury from vacuum cleaner suddenly starting.

CLEANING AGITATOR

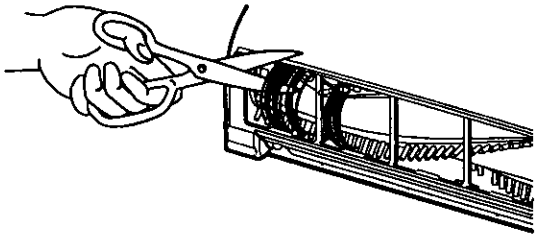

To clean agitator turn vacuum cleaner over, cut off any carpet pile and lint entangled around agitator with a pair of scissors in the slots provided.

Frequently check and remove hair, string and lint build-up in the brush area. If build-up becomes excessive, follow the steps below.

TO REMOVE BELT

Disconnect power cord from electrical outlet, and place on paper to protect the floor surface. Place vacuum cleaner in the full upright posiiton.

Turn the unit over so the agitator and base plate are facing upward.

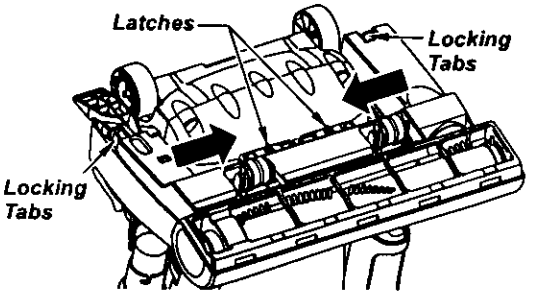

Locate the two latches and the two locking tabs which secure the base plate.

To remove the base plate, press the two latches inward.

Push in on the locking tabs toward the center of the vacuum cleaner.

Rotate the base plate away from the nozzle housing. The sides of the base plate need to be pulled slightly outward to clear the wheels.

The agitator and belt are now exposed. Carefully remove any residue that may exist in the belt area.

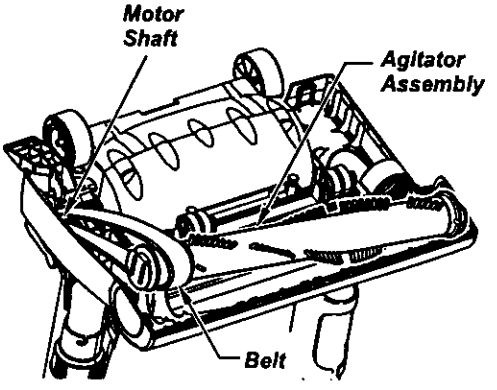

If the belt is still attached to the motor shaft, there will be tension on the agitator. If the belt is not broken, remove it from the motor shaft before lifting the agitator.

Carefully lift the one end of the agitator and then lift the other end.

WARNING

Personal Injury Hazard

Be careful when removing the agitator as the belt tension is high. Failure to do so could result in personal injury from the agitator releasing quickly and snapping away.

ENGLISH

TO CLEAN AGITATOR

NOTE: In order to keep cleaning efficiency high and to prevent damage to your vacuum cleaner, the agitator must be cleaned every time the belt is changed.

The agitator must also be cleaned according to the following schedule:

Vacuum Use	Clean Agitator
HEAVY - (used daily)	every week
MODERATE - (used 2-3 times/week)	every month
LIGHT - (used 1 time/week)	every 2 months

Remove any dirt or debris in the belt path area or in the agitator area.

TO REPLACE BELT

Make sure that the carpet/bare floor selector is in the **carpet** position.
Loop the new belt on the **motor shaft**.

NOTE: See **PARTS AND FEATURES** for belt number.

Loop the end of the new belt on the agitator.

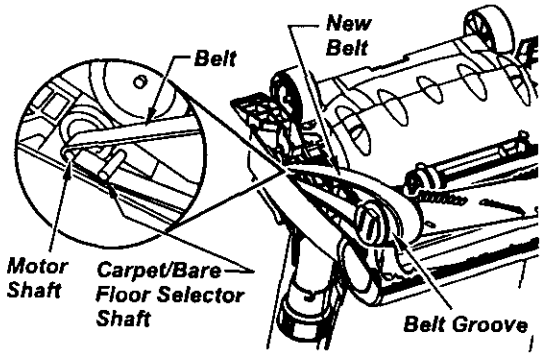

Align the square extension on each end cap with the slots in the frame of the nozzle.

NOTE: Care must be taken due to the belt tension during reassembly.

BELT ROUTING

Correct Routing of Belt
(Selector in Carpet Position)

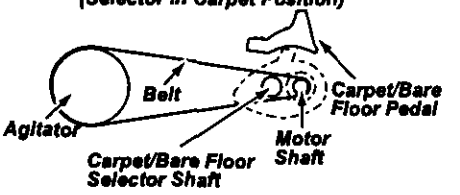

Incorrect Routing of Belt
(Belt on Selector Shaft)

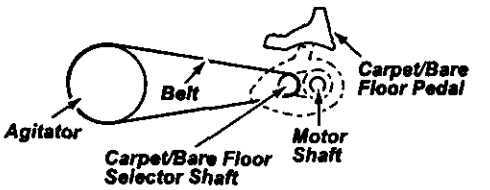

Incorrect Routing of Belt
(Selector in Bare Floor Position)

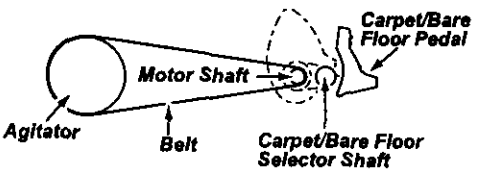

Press firmly, checking to see that each end is completely inserted.

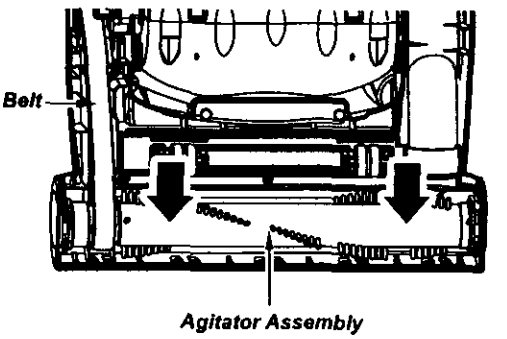

Check to see that the belt is centered in the belt groove. Turn the agitator with your fingers to see that it turns freely.

To re-attach the base plate, insert the tabs into the slots along the front edge of the base. Place the vacuum cleaner in full upright position. Lower the base plate to its original position.

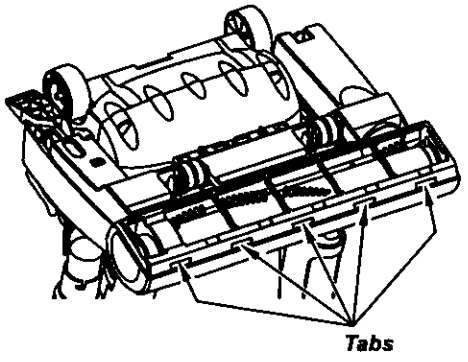

As the base is lowered the inner areas will brush against the dust compartment wheels.

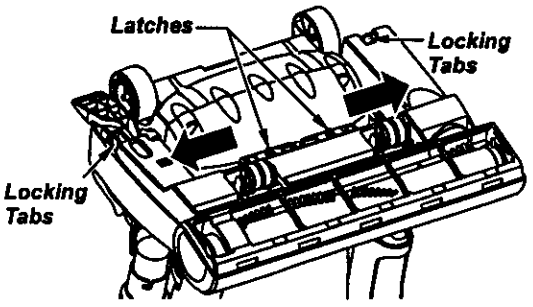

A gentle pull outward may assist in reassembly.

Press the base plate down until the two locking tabs snap into place.

Slide the right latch to the right and the left latch to the left to secure.

Return the vacuum cleaner to the upright position before plugging into the electrical outlet.

ENGLISH

CLOG REMOVAL

Always follow all safety precautions when cleaning and servicing the vacuum cleaner.

WARNING

Electrical Shock Or Personal Injury Hazard

Disconnect electrical supply before servicing or cleaning the unit. Failure to do so could result in electrical shock or personal injury from vacuum cleaner suddenly starting.

If the vacuum cleaner does not seem to have adequate suction, first check if the dust bin is full or if a filter is clogged. See **DUST BIN CLEANING** and **FILTER CHANGING**.

If the dust bin and filter areas are free of clogs, check the hose area. Remove extension hose by grasping the hose collar, twisting, and pulling straight off.

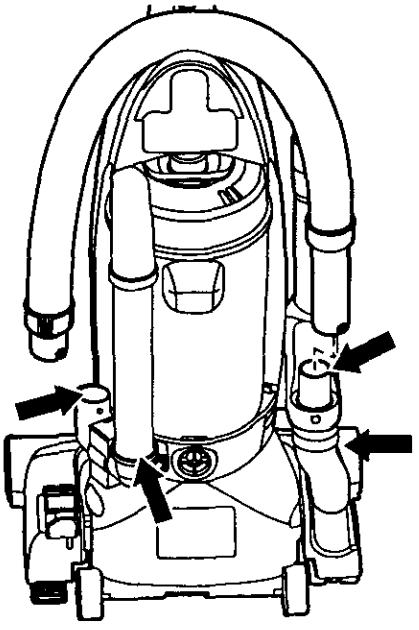

Visually inspect the hose and the base area into which the hose is connected.

Remove any visible clog.

Re-connect the extension hose to the dust bin port assembly. Plug in the vacuum cleaner and turn it on. Stretch the hose to maximum length and then allow the hose to return to its storage length.

Turn the unit off and unplug the unit.

Remove dust bin and check dust bin port and secondary filter for clogs. If the dust bin and filter areas and the hose areas are free of clogs, check the nozzle area. To check this area, see the section on **AGITATOR CLEANING.**

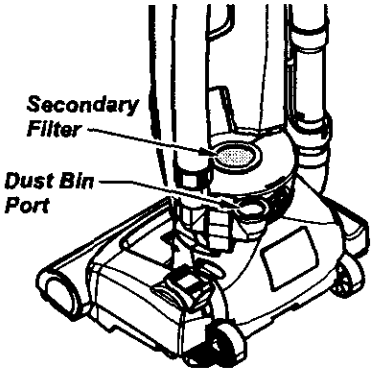

Return the vacuum cleaner to the upright position before plugging into an electrical outlet.

WARNING

Personal Injury Hazard

DO NOT place hands or feet underneath the unit at any time. The agitator will be revolving rapidly when the vacuum cleaner is turned on and is in the carpet setting.

LIGHT BULB CHANGING

WARNING

Electrical Shock Or Personal Injury Hazard

Disconnect electrical supply before performing maintenance or cleaning the unit. Failure to do so could result in electrical shock or personal injury from vacuum cleaner suddenly starting.

TO REMOVE LIGHT BULB

Disconnect power cord from electrical outlet. Lower handle to lay vacuum cleaner flat.

Pry out light lens at slots by inserting screwdriver into slot, pushing down on the lens and rotating the screwdriver handle toward unit.

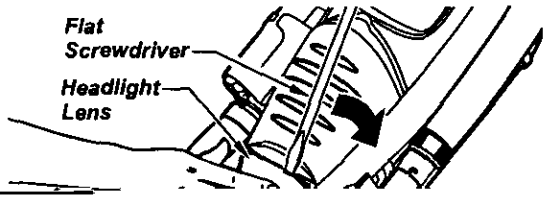

To replace the light bulb carefully insert securely into slot. Replace lens cover.



Replace lens cover by inserting bottom tab of lens into slots then applying pressure to top tabs with a screwdriver.

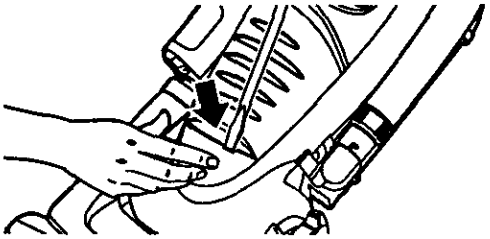

A "popping" sound indicates lens is snapped properly in place.

Note: See **PARTS AND FEATURES** for bulb number.

CAUTION

LIMPIEZA DEL AGITADOR

Nota: Para mantener una alta eficiencia de limpieza y evitar el daño a la aspiradora, hay que limpiar el agitador cada vez que se cambia la correa.

También hay que limpiar el agitador según el siguiente horario:

El uso de la aspiradora	Limpie el agitador
Frecuente - (usada dirariamente)	cada semana
Moderado - (usada 2 o 3 veces por semana)	cada mes
Ligero - (usada 1 vez por semana)	cada 2 meses

Retire todo indicio de basura o suciedad de la zona de la correa y del agitador.

PARA CAMBIAR LA CORREA

Asegurase que el selector de pisos con y sin alfombra este en la posición de **pisos con alfombra.** Coloque la nueva correa alrededor del **eje de transmisión del motor.**

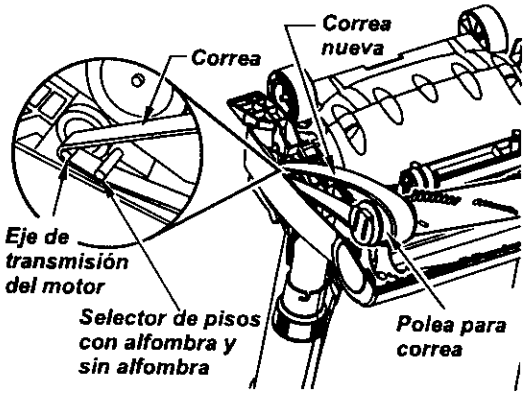

Nota: Consulte las **PIEZAS Y CARACTERÍSTICAS** para determinar el N°. de correa.

Ensarte la correa nueva sobre el agitador.

Alinee la extensión cuadrada de cada tapa con las ranuras de la estructura de la boquilla.

Nota: Debido a la tensión de la correa, debe actuar con cuidado al instalarla.

CORREA SOBRE LA RANURA GUIA

Correa Está Centrada Sobre la Ranura Guia
(Selector de pisos con y sin alfombra este en la posición de pisos con alfombra)

Correa No Está Centrada Sobre la Ranura Guia
(Correa aldrededor del eje del selector de pisos con y sin alfombra)

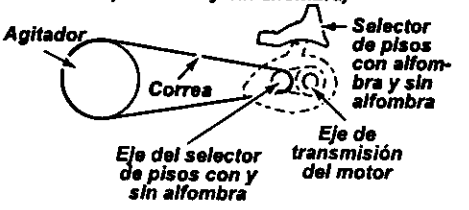

Correa No Está Centrada Sobre la Ranura Guia
(El selector de pisos con y sin alfombra este en la posición de pisos sin alfombra)

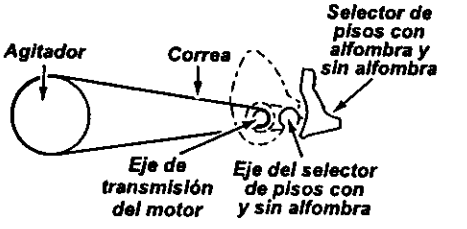

Haga presión firmemente, asegurándose de que hayan entrado bien ambos extremos.

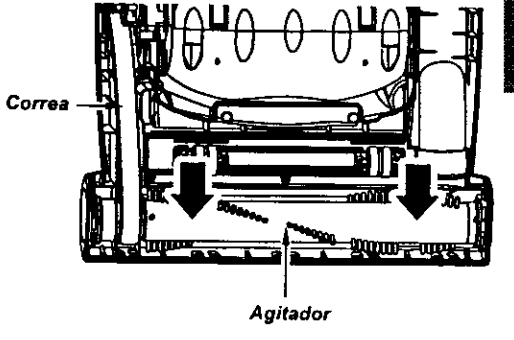

Asegúrese de que la correa esté centrada sobre la ranura guía. Gire el agitador con los dedos para asegurarse de que gire libremente.

ESPAÑOL

Para reinstalar la placa de la base, inserte las cuatro pestañas dentro de las cuatro ranuras ubicadas a lo largo del borde frontal de la base. Coloque la aspiradora en la posición vertical.

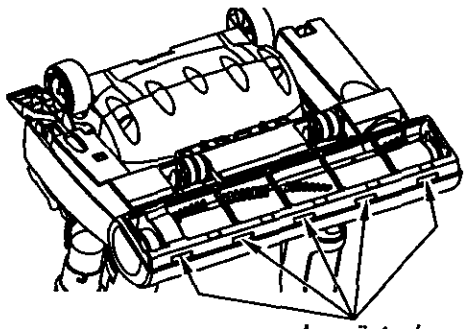

Lengüetas/ Ranuras

Coloque la placa de la base en su posición original.

Cuando este bajando la base, la parte interior va a rozar contra las ruedas. Si ud, le hala un poco afuera le ayudara a resamblarlo.

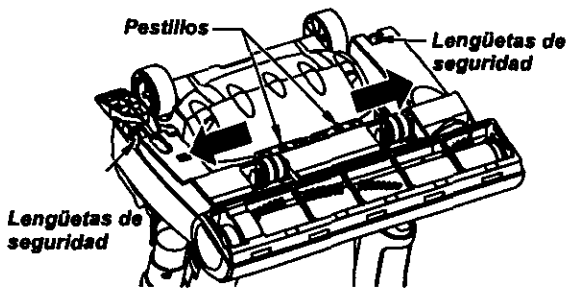

Precione la base del plato para abajo hasta que las lengüetas de seguridad estén en su lugar.

Deslize el pestillo de la izquierda a la izquierda y el pestillo derecho a la derecha para que estan seguros.

Coloque la aspiradora en la posición vertical antes de conectarla en el enchufe.

CÓMO ELIMINAR LOS RESIDUOS DE BASURA EN LOS CONDUCTOS

Proceda siempre con precauciones de seguridad al limpiar y dar servicio la aspiradora.

ADVERTENCIA

Peligro de choque eléctrico o lesión corporal

Desconecte la unidad antes de limpiarla o darle servicio. De lo contrario podría producirse un choque eléctrico o causar lesión corporal si la aspiradora arranca de manera imprevista.

Si considera que la aspiradora no aspira bien asegúrese primero de que la bolsa no esté llena y de que el filtro no esté atascado. Consulte las instrucciones sobre CAMBIO DE LA BOLSA PARA POLVO y LIMPIEZA DES FILTROS.

Si las zonas del filtro y la cubo de la basura no están atascadas, examine la zona de la manguera. Retire el extremo inferior de la manguera expansible de la aspiradora tomándola por el collar y tirando de hacia arriba.

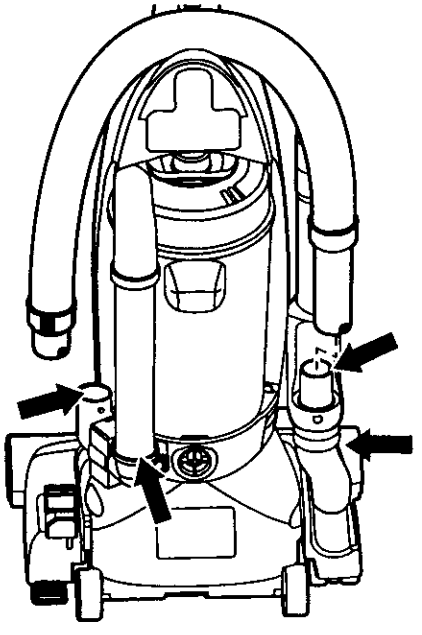

Examine visualmente la zona de la base donde se inserta la manguera.

Retire cualquier material bloqueante.

Reconecte la manguera de extensión al montaje de la puerta del canasto de basura. Enchufe la aspiradora y échela a andar. Estire la manguera a la longitud máxima y retórnela a la longitud de almacenaje.

Apague la unidad y desconéctela.

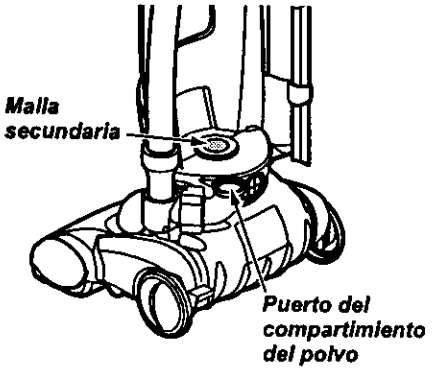

Remueva el canasto de basura y chequee la puerta y filtro secundario por obstáculos. Si el canasto de basura y áreas de filtradoy áreas de la manguera están libres de obstáculos, chequee el área de la boquilla. Para chequear esta área, vea la sección sobre **LIMPIEZA DEL AGITADOR.**

Retorne la aspiradora a la posición vertical antes de enchufarla en un tomacoriente.

ADVERTENCIA

Peligro de lesión personal

NO coloque nunca las manos ni los pies debajo de la unidad. El agitador dará vueltas rápidamente cuanda la aspiradora esté encendida y esté en la posición "carpet setting" (con alfombra).

ESPAÑOL

CAMBIO DE LA BOMBILLA

ADVERTENCIA

Peligro de choque eléctrico o lesión corporal

Desconecte la unidad antes de limpiarla o darle servicio. De lo contrario podría producirse un choque eléctrico o causar lesión corporal si la aspiradora arranca de manera imprevista.

PARA QUITAR LA BOMBILLA

Desconecte el cable de poder del tomacorriente. Baje la manija para poner la aspiradora plana.

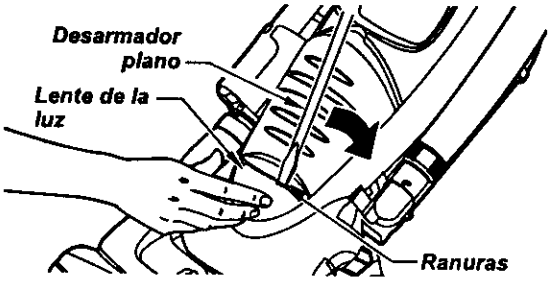

Extraiga el lente de la hendidura insertando el desarmador en la rendija, empuje hacia abajo el lente y girelo con el desa mador en diracción hacia la unidad.

CUIDADO

No use una bombilla de más de 9 vatios (13 volts). Cuando se use la aspiradora por un largo periodo de tiempo, el calor de la bombilla puede calentar las partes de plastico cerca.

Remueva la bombilla tirando derecho hacia afuera.



CUIDADO

No conecte o encende la aspiradora antes de armarla completamente.

Para reemplazar la bombilla cuidadosamente insértela seguramente en la ranura. Reemplace la cubierta de la lente.





Substituya la cubierta de la lente insertando la parte inferior de la lente en la ranura, entonces apliqué presión en la parte superior con un destornillador. Un sonido "pop" indica que la lente está colocada correctamente en su lugar.

Nota: Mire **PIEZAS Y CARACTERISTICAS** para el numero de la bombilla.

RECONOCIMIENTO DE PROBLEMAS

Revise este recuadro para encontrar soluciones a problemas que puede corregir usted mismo. Cualquier otro servicio debe ser realizado por SEARS u otro agente de servicio calificado.

ADVERTENCIA **Peligro de choque eléctrico**

Desconecte la aspiradora antes de efectuar el mantenimiento a su aspiridora. De lo contrario podría producirse un choque eléctrico o causar lesión corporal.

PROBLEMA	CAUSA POSIBLE	SOLUCIÓN POSIBLE
La aspiradora no funciona.	1. Está desconectada. 2. Cortacircuitos botado o fusible quemado en el tablero de servicio de la residencia. 3. Interruptor de encendido/apagado no está en la posición ON. 4. Protector térmico activado.	1. Conecte bien, oprima selector de encendido/apagado a la posición ON. 2. Restablezca el cortacircuitos o cambie el fusible. 3. Coloque el interruptor de encendido/apagado en la posición ON. 4. Reajuste el protector térmico.
No aspira satisfactoriamente.	1. Cubo de la basura lleno o atascado. 2. Ajuste incorrecto de nivel de pelo de la alfombra. 3. Agitador desgastado. 4. Boquilla, o portillo de cubo de la basura atascada. 5. Manguera atascado. 6. Manguera rota. 7. Correa rota. 8. La manguera no está bien insertada. 9. Activación del sistema de protección del motor.	1. Cubo de la basura limpio. 2. Ajuste el nivel. 3. Cambie el agitador 4. Revise COMÓ ELIMINAR LOS RESIDUOS DE BASURA EN LOS CONDUCTOS. 5. Limpiar tubo para la mugre. 6. Cambie la manguera. 7. Cambie la correa. 8. Inserte bien la manguera 9. Determine si existen bloqueos.
La aspiradora levanta tapetes o es difícil de empujar.	1. Ajuste incorrecto de nivel de pelo de la alfombra.	1. Ajuste el nivel.
La luz no funciona.	1. Bombilla fundida.	1. Cambie la bombilla.
El ensamble del agitador no gira	1. Selector encendido/apagado del agitador en posición OFF. 2. Correa rota.	1. Ponga el selector en posición ON, 2. Cambie la correa.
Restricción del flujo de el uso de los accesorios. **Cambio de sonido.**	1. El uso de los accesorios limita el flujo de aire. 2. La pelusa de una alfombra nueva obstruye el paso de aire.	1. Revise USO DE LOS ACCESORIOS. 2. Revise CÓMO ELIMINAR LOS RESIDUOS DE BASURA EN LOS CONDUCTOS y limpie la manguera.
Indicador de polvo, algunos modelos, no funciona.	1. Celdas ópticas están sucias.	1. Limpie las celdas ópticas.

ESPAÑOL

Get it fixed, at your home or ours!

Your Home

For repair – in your home – of all major brand appliances, lawn and garden equipment, or heating and cooling systems, no matter who made it, no matter who sold it!

For the replacement parts, accessories and owner's manuals that you need to do-it-yourself.

For Sears professional installation of home appliances and items like garage door openers and water heaters.

1-800-4-MY-HOME® Anytime, day or night
(1-800-469-4663) (U.S.A. and Canada)
www.sears.com www.sears.ca

Our Home

For repair of carry-in products like vacuums, lawn equipment, and electronics, call or go on-line for the nearest **Sears Parts and Repair Center.**

1-800-488-1222 Anytime, day or night (U.S.A. only)
www.sears.com

To purchase a protection agreement (U.S.A.) or maintenance agreement (Canada) on a product serviced by Sears:

1-800-827-6655 (U.S.A.) **1-800-361-6665** (Canada)

Para pedir servicio de reparación a domicilio, y para ordenar piezas:
1-888-SU-HOGAR℠
(1-888-784-6427)

Au Canada pour service en français:
1-800-LE-FOYER℠
(1-800-533-6937)
www.sears.ca

SEARS

© Sears, Roebuck and Co.

® Registered Trademark / ™ Trademark / ℠ Service Mark of Sears, Roebuck and Co.
® Marca Registrada / ™ Marca de Fábrica / ℠ Marca de Servicio de Sears, Roebuck and Co.
℠ Marque de commerce / ℠ Marque déposée de Sears, Roebuck and Co.